

Ympress® Laser E250C

Strong, consistent and highly formable

Ympress® Laser E250C is a hot-rolled structural steel. It is optimised for efficient laser cutting and post-cut processing. The product combines high strength with outstanding formability and consistent quality. It replaces conventional construction steel for applications where high strength and good formability are essential. These include building and construction profiles, racking and shelving.

Ympress® Laser E250C offers exceptional flatness, minimised internal stress and high-quality surfaces. Consistent product characteristics ensure fast, reliable automated processing for increased productivity and improved part yield. A clean-cut edge – even at high cutting speeds - allows simple release of cut parts and reduces post-cut work. Suitable also for conventional cutting methods, Ympress® Laser E250C can be easily welded and galvanised.

Mechanical properties (transverse to the rolling direction)

	Min. yield strength	Min. - Max. tensile strength	Elongation after fracture A			Min. bending radius
			t < 3mm	3mm ≥ t < 5mm	t ≥ 5mm	Transverse* ≤ 180°
	R _{eh} in MPa	R _m in MPa	L ₀ = 80mm	L ₀ = 5.65√S ₀ mm (%)	L ₀ = 5.65√S ₀ mm (%)	(t)
Typical value	285	430	26	34	30	-
Guaranteed	≥ 240	370-490	23	24	24	0.5
EN-10025-2 S235J2	235	360-510	19	24	24	-

* ≤ 180° bend radius, measured transverse to the rolling direction

Chemical composition (% by weight)

	C	Si	Mn	P	S	Cu	Al _{tot}	Ceq*	Ceq*
								< 6mm	> 6mm
Guaranteed	≤ 0.17	≤ 0.030	≤ 1.10	≤ 0.025	≤ 0.020	≤ 0.070	≥ 0.015	0.20	0.28
EN 10025-2 S235J2	≤ 0.17	-	≤ 1.40	≤ 0.025	≤ 0.025	≤ 0.550	-	-	-

*Ceq is a typical value

Impact strength (optional and parallel to the rolling direction)

		Impact test		
		J at -20°C	J at 0°C	J at 20°C
Guaranteed*	6 < d ≤ 12.7mm 12.7 < d ≤ 20mm	≥27	≥27	≥27
EN 10025-2 S235J2		≥27		
EN 10025-2 S235J0			≥27	
EN 10025-2 S235JR				≥27

* In accordance with EN 10149 the impact values above are only guaranteed if accepted on order

Tolerances on thickness

Ympress® Laser products comply to ½ 10051:2010. Tighter tolerances are available on request.

Certification

A 2.2 certificate is issued as standard with Ympress® Laser products . Other certificate types are available on request.


Product support

We want you to get the best from Ympress® Laser products . Our technical engineers and trained sales staff are always happy to answer your questions on steel selection and application. Our engineers are available to assist you with process and product design optimisation for improved throughput, yield and end-product performance.

Ympress® Laser range

Steel grades:	E250C, S355MC, S420MC
Thickness range: (sheets)	1.5 - 15mm (up to 20mm on request)
Width range:	900 - 2070mm
Surface treatment:	Hot rolled dry, pickled and oiled

Available dimensions of Ympress® Laser E250C

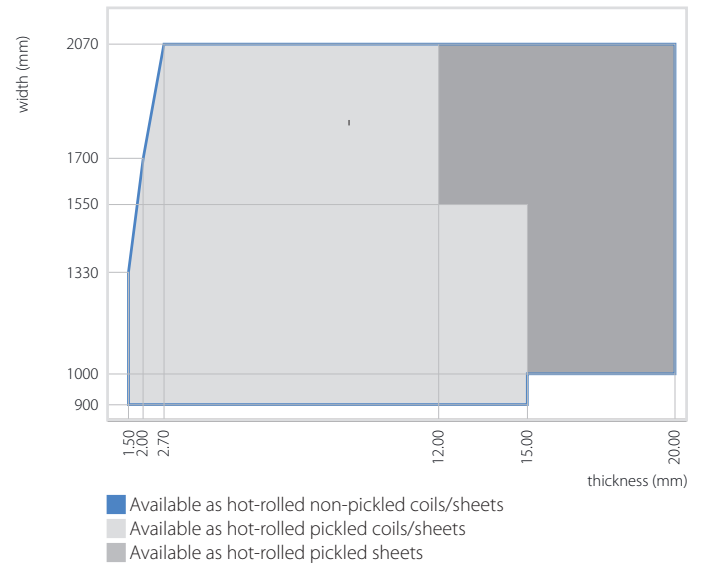

www.tatasteeleurope.com

Tata Steel

PO Box 10.000
1970 CA IJmuiden
The Netherlands

E: strip.enquiries@tatasteel.com
www.tatasteeleurope.com/strip

IN0117:100:EN:0516

While care has been taken to ensure that the information contained in this publication is accurate, neither Tata Steel Europe Limited, nor its subsidiaries, accept responsibility or liability for errors or for information which is found to be misleading.

Tata Steel Europe Limited is registered in England under number 05957565 with registered office at 30 Millbank London, SW1P 4WY, United Kingdom.

Copyright 2016
Tata Steel Europe Limited